


# High Temperature, Inductive Proximity Sensors

MDT Staff

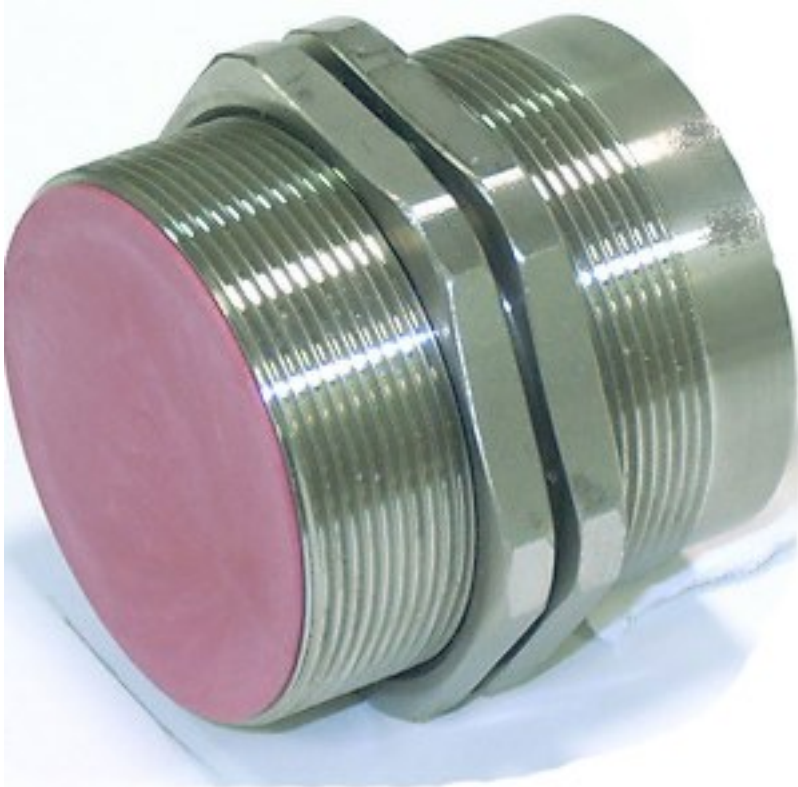

Automation Systems Interconnect, Inc. is pleased to announce their line of high temperature inductive proximity sensors are now available in sizes M8, M12, M18, M30 and M50. Styles include standard and short housings, shielded and non-shielded, PNP N.O. & N.C & NPN N.O. & N.C. output with a variety of sensing ranges up to 30mm. The sensors are available with either silicon or Teflon cable in 2, 5 or 10 meter standard lengths or any custom length your application may require. Made from corrosion resistant, rugged stainless steel housing material, these sensors are durable under the harshest of environments. Other features include reverse circuit and polarity protection, factory pre-set lifetime calibration, so no user adjustments are necessary.

For more information, visit [www.asi-ez.com](http://www.asi-ez.com) [1].

**Source URL (retrieved on 01/28/2015 - 11:38am):**

[http://www.mdtmag.com/product-releases/2013/03/high-temperature-inductive-proximity-sensors?qt-video\\_of\\_the\\_day=0](http://www.mdtmag.com/product-releases/2013/03/high-temperature-inductive-proximity-sensors?qt-video_of_the_day=0)

**Links:**

[1] <http://www.asi-ez.com>